



<https://uni-luce.com>
+39 339 505 5880
info@uni-luce.com

Via Monselice, 26, 20832 Desio
MB, Italy


STING 24



- 1681- 24
- 1681-W24
- 1681-GR24
- 1681-DGR24

Available colors:

Beam angle: 10° 19° 28° 63°
LED Color: 3000K 4000K 6000K 5000K
LED power: 2 x 10W
Lamp Power: 2 x 13,5W
CRI: 90
Lamp Lumen: 2 x 1344lm
Material: die-casting powder coating aluminum
Location: Exterior
Fixation: Bollards
Product dimension: D105 x 3000mm
Input: 220-240V 50/60HZ
IP: 65
Class: III
Light Source: LED

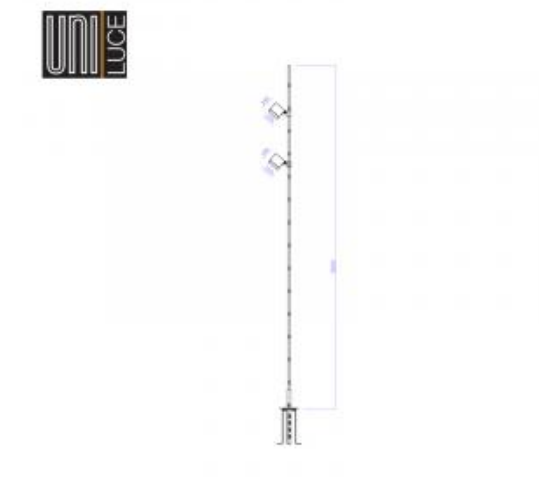



<https://uni-luce.com>

+39 339 505 5880

info@uni-luce.com

Via Monselice, 26, 20832 Desio

MB, Italy

As a projector for exterior use, STING has many appearances. It comes as a slim bollard with 1 or 2 light units. Like this, STING can be used throughout a complete outdoor project, to light up trees, emphasize architecture or highlight pathways.

Although compact in size, the clever design of STING offers a solution without any visible cabling outside of the luminaire. The hinge of the projector not only serves to tilt it into the wanted direction, it also hides away a passage for the cabling.

Uniform in design, STING comes in wide range of beam angles: from narrow 10° up to wide one with 63.°